


END FEED FITTING SPECIFICATION

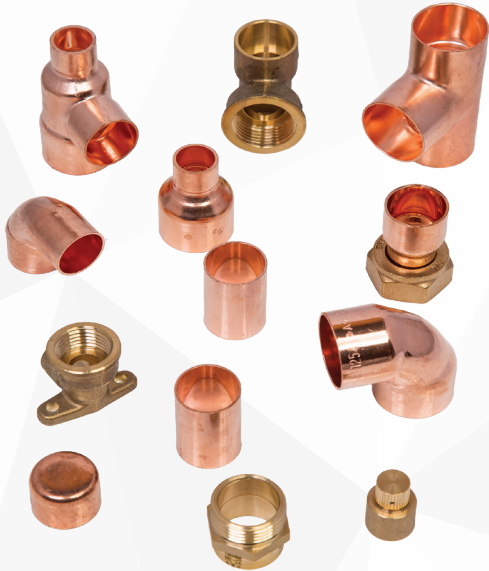

Features and Benefits

- Suitable for hot and cold drinking water, heating and chilled water systems
- Ideal for confined spaces
- Available in sizes 8 - 54 mm
- Manufactured from high quality copper material in accordance with EN 124-2
- Suitable for connecting copper tubes in accordance with EN 1057
- Designed for solder and brazing applications*

Application & Technical Information

Drinking water	Y
Sanitary water	Y
Heating and chilled water systems	Y
Compressed air	Y
Gas	Y
Available sizes	8 - 54 mm
Operating parameters solder 6 - 54 mm	Using tin silver 95/5% 25 bar at 0C to 30C 25 bar at 65C 19 bar at 95C 16 bar at 110C
	Using tin lead 50/50% or 60/40% 16 bar at 0C to 30C
Operating parameters brazed 15 mm	35.1 bar at -20C to 110C 29.8 bar at 150C
Material	Copper and yellow brass

*with the acceptance of Union fittings with copper tails which can only be soft soldered

Tel: 0845 600 3060 | Fax: 0845 600 6775 | Web: www.masterflow.uk.com

MasterFlow Ltd, Suite 2a, 1 Derby Street, Leigh, Lancashire, WN7 4PF